

Why smooth?

Equally at home in the high street or the workplace, smooth floors provide attractive designs that are easy to maintain and install. Whether it's looks, durability or whole life costs that concerns you most, smooth delivers on every count.

Smooth floors can be welded for an impervious floor. They are even suitable for total interior cladding for clean room environments.


- Hygienic
- · Easy to install
- · Easy to maintain
- Flexible
- Retains appearance
- Attractive finish
- Acoustic options
- · Co-ordinate with Altro safety flooring and wall cladding


Altro smooth flooring - simplicity with style

Altro smooth flooring has had a significant makeover. This new collection features a versatile, flexible design in wide choice of 24 colours, plus a new approach to wood-look flooring. The latter offers you the same palette in a smooth, safety or acoustic flooring, enabling you to combine different types of flooring in adjacent areas without compromising on aesthetics.

The new smooth ranges co-ordinate with the bright colours of Altro Whiterock wall cladding and Altro safety flooring, particularly Altro Suprema II, to create stunning interiors in a host of applications.

We strongly recommend carrying out a risk assessment in any area in which the installation of smooth flooring is considered, focusing on the potential risk posed by contaminants from spillages. See pages 32 and 54 for further information.

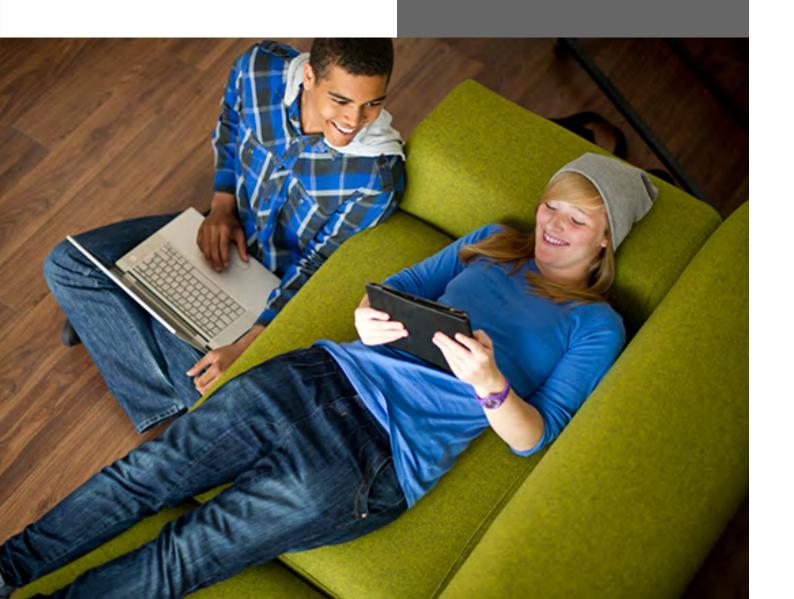

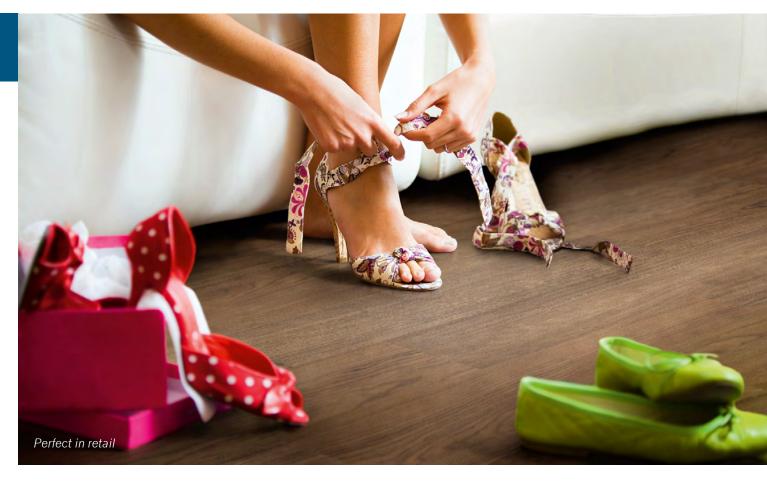

This new wood-look smooth flooring brings homely warmth or classic sophistication to any environment. It shares its palette with the new Altro Wood Safety range and has been designed to work in conjunction with it in those areas where you require different levels of slip resistance without compromising on aesthetics. It is easy to maintain and can be welded to provide a hygienic surface, making it ideal for areas where infection control and high standards of cleanliness are required.

Co-ordinates with:

- Altro Wood Smooth Acoustic (See pages 190-191)
- Altro Wood Safety (See pages 86-87)

Contributes to reducing the environmental impact of your specification

 A+ BRE Generic Green Guide Rating for Smooth Vinyl Flooring, full details available at www.thegreenguide.org.uk

Typical applications:

- education
- · care homes
- hospitals
- · hospitality
- retail

Please see product selector on page 23 for full details.

Dimensions: 2m x 20m Format: Roll Thickness: 2mm













Flaxen Oak WSM2054 WR338 / A1M27 LRV 38



White Oak WSM2051 WR335 / A1M335

LRV 52



Light Maple WSM2055 Warm Beech WSM2058 WR339 / A1M339



WR342 / A1M224

LRV 24 LRV 36



Pale Cherry WSM2052 Classic Cherry WSM2053 Mellow Oak WSM2056 WR336 / A1M239

LRV 22



WR337 / A1M337 **LRV 17**



WR340 / A1M340

LRV 37



Mid Walnut WSM2057 WR341 / A1M160 **LRV 15**

Mature Oak WSM2062 WR346 / A1M62

LRV 8

WR345 / A1M62

LRV 6



Mature Walnut WSM2061 Rich Cherry WSM2059 WR343 / A1M246

LRV 15



Red Maple WSM2060 WR344 / A1M41

LRV 10

Please see our Guide to matching The Altro Wood Collection on page 5.

We strongly recommend carrying out a risk assessment in any area in which the installation of smooth flooring is considered, focusing on the potential risk posed by contaminants from spillages. Please refer to page 32 and 54 for further information.

Manufactured by: Itro Ltd. Works Road tchworth Garden City SG6 1NW United Kingdom

Product information Tel: +44 1462 707 600 E-mail: enquiries@altro.com

Codes: LRV = Light Reflectance Value, WR = Weldrods, A1M = Mastic

For an unobtrusive appearance, colour matched weldrods and mastics are available.



Extend the use of Altro Wood Smooth into those areas where noise reduction matters to improve the wellbeing of users with this new 18dB product.

Co-ordinates with:

- Altro Wood Smooth (See pages 188-189)
- Altro Wood Safety (See pages 86-87)

Contributes to reducing the environmental impact of your specification

 A+ BRE Generic Green Guide Rating for Smooth Vinyl Flooring, full details available at www.thegreenguide.org.uk

Typical applications:

- · student accommodation
- education
- care homes
- · government buildings
- social housing

Please see product selector on page 23 for full details.

















Haven WSMA3783 WR342 / A1M224 LRV 36



Hush WSMA3781 WR338 / A1M27 LRV 38




Karma WSMA3784 WR343 / A1M246 **LRV 15**

We strongly recommend carrying out a risk assessment in any area in which the installation of smooth flooring is considered, focusing on the potential risk posed by contaminants from spillages. Please refer to page 32 and 54 for further information.

EN14041

Manufactured by:
Altro Ltd. Works Road
Letchworth Garden City
SG6 1NW
United Kingdom



Codes: LRV = Light Reflectance Value, WR = Weldrods, A1M = Mastic

For an unobtrusive appearance, colour matched weldrods and mastics are available.

Altro Zodiac Smooth™



This new smooth range offers a versatile, flexible design in a wide choice of 24 colours. Altro Zodiac features tonal neutrals that work together as well as vibrant, on trend colours. Characterised by its monolithic look, Altro Zodiac is solid and reassuring, while offering enough complexity to deliver discrete and sophisticated installations with light and dark tonal areas where required.

Ideal in large areas, it enables you to capture many moods, from warm and friendly in care homes to cool and trendy in student accommodation.

Altro Zodiac is perfectly complemented by the bright colours of Altro Whiterock wall cladding and Altro Suprema II safety flooring to create stunning interiors in a host of applications.

It is easy to maintain and can be welded to provide a hygienic surface, making it ideal for areas where infection control and high standards of cleanliness are required.

Contributes to reducing the environmental impact of your specification:

 A+ BRE Generic Green Guide Rating for Smooth Vinyl Flooring, full details available at www.thegreenguide.org.uk

Typical applications:


- · care homes
- · children's hospitals
- · student accommodation
- · primary school classrooms
- · secondary school corridors
- offices
- · foyers
- galleries / retail
- clinics
- vets

Please see product selector on page 23 for full details.

Dimensions: 20m x 2mFormat: RollThickness: 2mm



Altro Zodiac Smooth™

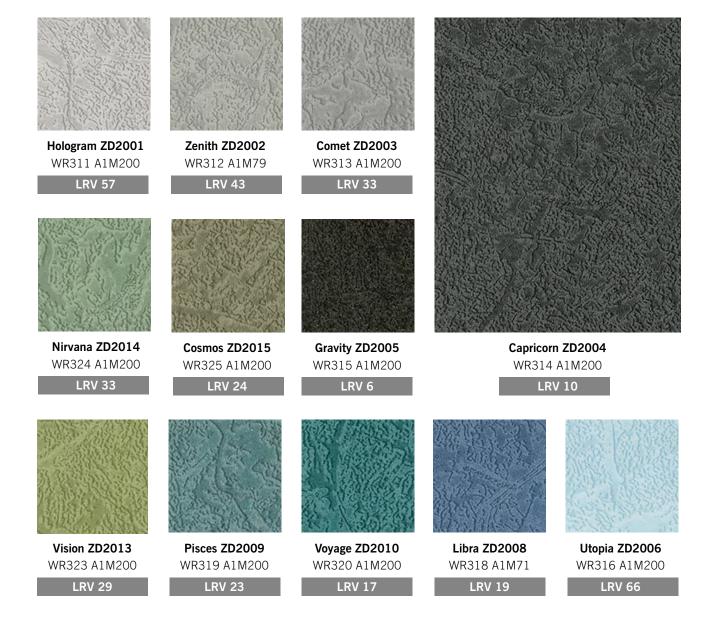
















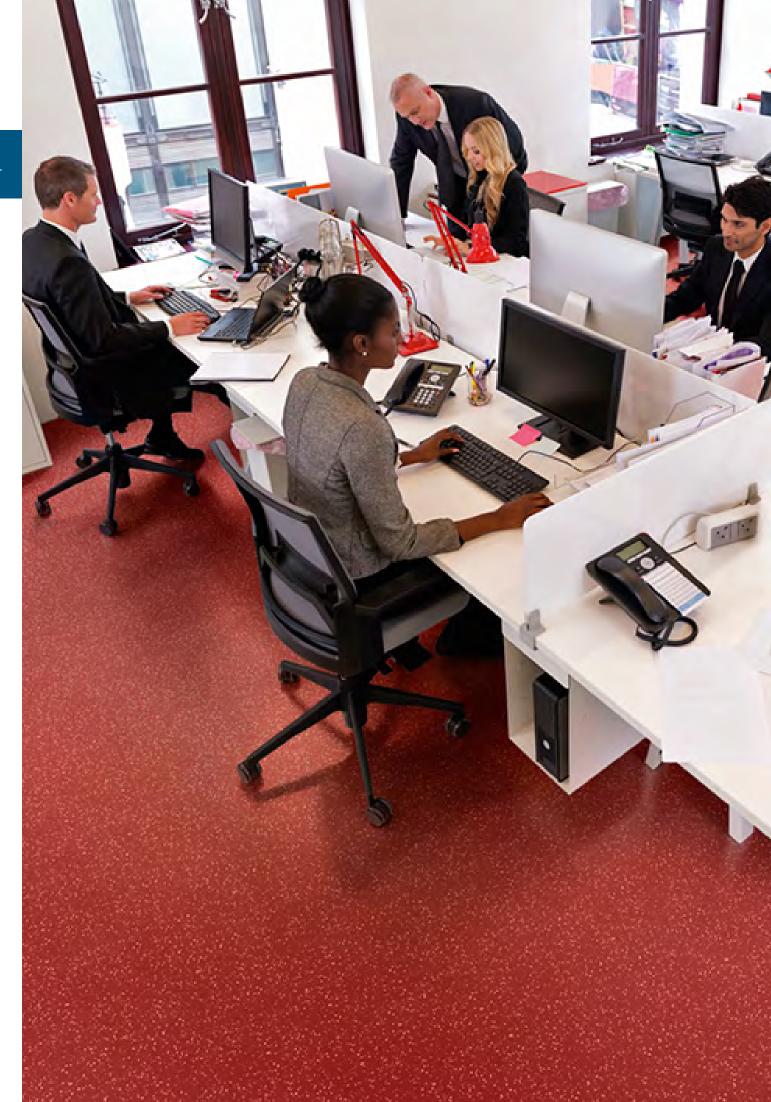

Altro Nuvola Rubber flooring – stylish and soft underfoot


Why rubber?

Rubber resists most things – including bumps and scrapes. This helps it to retain its appearance and extend its life, ensuring that rubber is an extremely cost-effective floor covering.

As well as being hardwearing, the material also gives good underfoot comfort and provides excellent sound absorption. This makes it perfect for sports halls, leisure centres and other heavy-duty applications, or in environments subjected to constant foot traffic such as in schools, libraries, offices and retail establishments.

- · Hardwearing
- Hygienic
- · Sound absorbent
- · Comfortable underfoot
- Flexible & resilient
- · Easy maintenance
- · Retains appearance
- Attractive finish





For more information on life cycle costs, see page 208

A+ BRE Generic Green Guide Rating for Rubber Flooring, full details available at www.thegreenguide.org.uk



Altro Nuvola Cirrus™



New Altro Nuvola Cirrus offers a wide range of 13 chipped designs with subtle, background colours. The palette has been designed to offer you the scope to co-ordinate with Altro Safety flooring ranges including Altro Unity, Altro Walkway 20 and Altro XpressLay, lending it to installation in areas adjacent to those where slip resistance is key.

With its acoustic and resilient properties, this range supports the design of a contemporary environment in schools, the health care sector, public buildings and offices.

Altro Nuvola Cirrus has a smooth finish and is in sheet form to provide a hygienic, seamless surface.

Contributes to reducing the environmental impact of your specification:

 A+ BRE Generic Green Guide Rating for Rubber Flooring, full details available at www.thegreenguide.org.uk We strongly recommend carrying out a risk assessment in any area in which the installation of rubber flooring is considered, focusing on the potential risk posed by contaminants from spillages. Please refer to page 32 and 54 for further information.

Typical applications:

- walkways
- · play areas
- stairwells
- corridors
- offices
- retail
- libraries
- lifts


Please see product selector on page 23 for full details.








AWR002 LRV 42



Moat ANC2004 AWR004 LRV 22



Smoulder ANC2005 AWR005 LRV 14



Panther ANC2006 AWR006

LRV 6



Powder ANC2007 AWR007 LRV 23



Indigo ANC2008 AWR008 LRV 10



Ribbon ANC2014 AWR014

LRV 9




Wicker ANC2011 AWR011 LRV 53



Mouse ANC2001 AWR001 LRV 26



Saffron ANC2015 AWR015 LRV 44



Spice ANC2010 AWR010 LRV 14



Ruby ANC2009 AWR009

LRV 10



Ivy ANC2012 AWR012

LRV 16



Altro Nuvola Stratus™



This new range offers 13 colours in a studded, resilient rubber floor, enabling you to create versatile and beautiful interior environments. With an iconic, textured stud giving interest and depth, Altro Nuvola Stratus offers a broad palette of trendy, cool, intense, vibrant, rich and playful colours.

The stud itself is curved and keeps dirt traps to a minimum, making cleaning and maintenance easy and contributing to appearance retention. The elasticity of the rubber provides anti-fatigue properties, cushioned comfort underfoot and acoustic benefits making it of particular value in working areas, plus those with high levels of physical activity.

Contributes to reducing the environmental impact of your specification:

 A+ BRE Generic Green Guide Rating for Rubber Flooring, full details available at www.thegreenguide.org.uk We strongly recommend carrying out a risk assessment in any area in which the installation of rubber flooring is considered, focusing on the potential risk posed by contaminants from spillages. Please refer to page 32 and 54 for further information.

Typical applications:

- stairwells
- · bus stations
- car showrooms
- · airport concourses
- exhibition halls
- · industrial gangways
- restaurants/bars
- · receptions/waiting rooms

Please see product selector on page 23 for full details.

Dimensions: 500mm x 500mm Format: Tile Thickness: 2.7mm





